



KARTA PRODUKTOWA

DTL-63CNC CNC Vertical Turning Lathe 6300 mm





KARTA PRODUKTOWA



Double-Column CNC Lathe

DTL-63CNC CNC Vertical Turning Lathe

Double-column CNC vertical turning lathe for heavy machining of workpieces with turning diameters up to 6300 mm



KARTA PRODUKTOWA

DTL-63CNC is a heavy-duty vertical turning lathe of the **double-column CNC** type, designed for precision machining of large and massive components in industrial, power generation, mining, construction and manufacturing facilities.

The design is based on a rigid, symmetrical double-column arrangement, hydrostatic table guideways, two ram heads and a CNC system for accurate and repeatable machining. The DTL-63CNC model offers a turning diameter of up to **6300 mm** and a table diameter of **5000 mm** with an option of **5700 mm**.

6300

Max. Turning Diameter

6300 mm

5000

Table Diameter

5000 mm, opcjonalnie 5700 mm

50T

Table Load Capacity

50 t, optional 90 / 120 t

75

Main Motor Power

75 kW, optional 90 kW

Heavy-duty CNC machine for large industrial components.

The DTL-63CNC combines a robust double-column construction, two working heads, hydrostatic table bearings, automatic lubrication, axis servodrives, ball screws and Siemens SINUMERIK 828D / 840D CNC control.

Photo Gallery

Images and Equipment Components

Technical Machine Images



KARTA PRODUKTOWA




Main Machine View

KARTA PRODUKTOWA




CNC Operator Panel

KARTA PRODUKTOWA

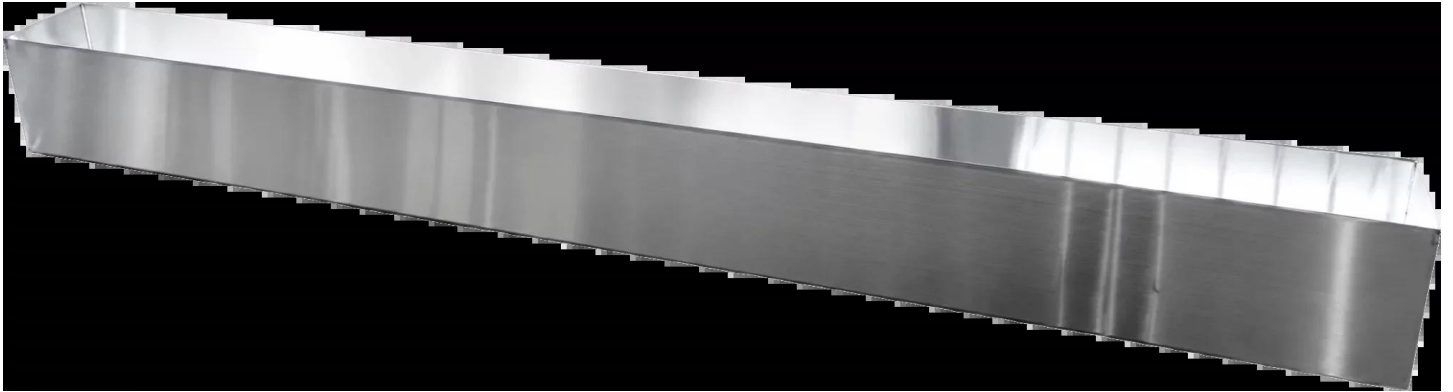


Beam / Guideways

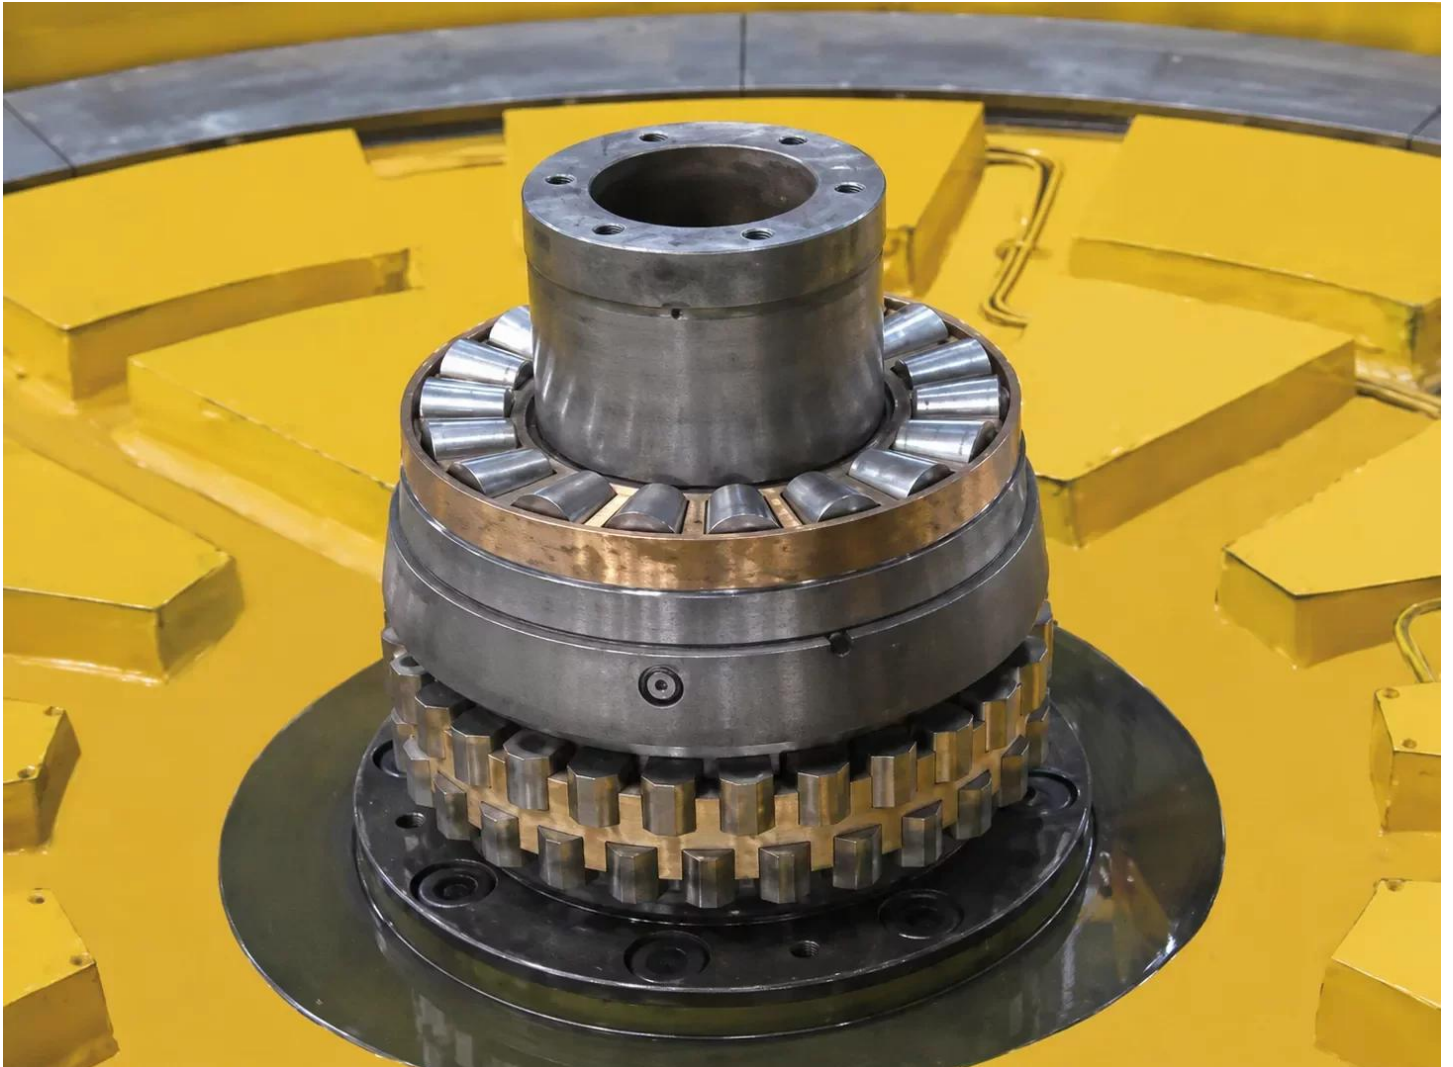


Spindle and Base

KARTA PRODUKTOWA

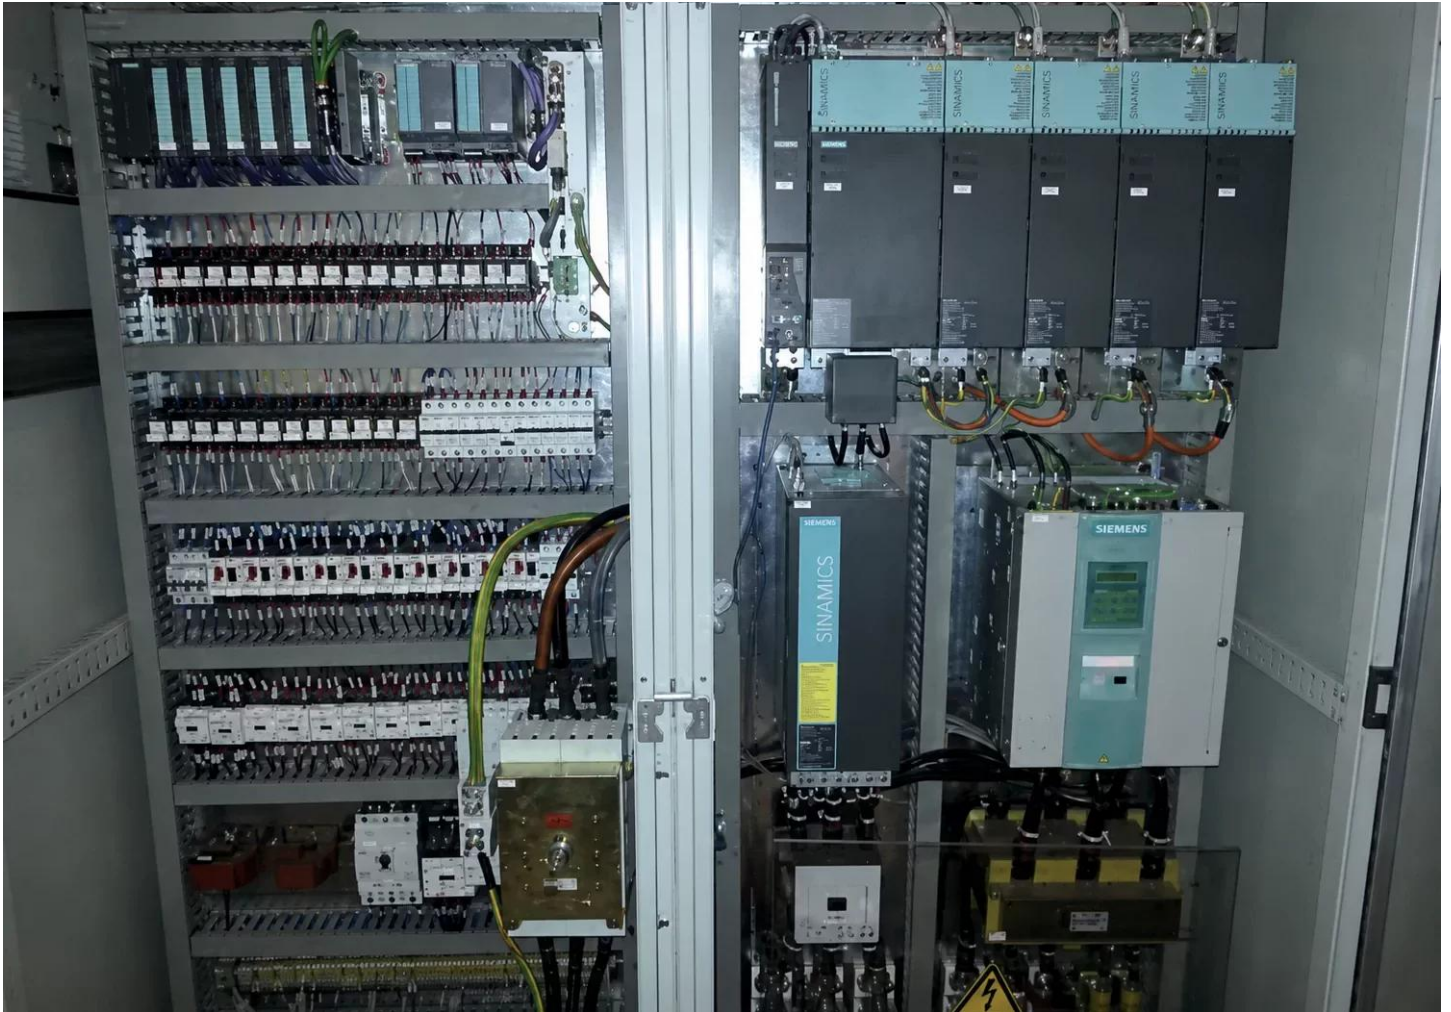

Electrical Cabinet
Standard Equipment

KARTA PRODUKTOWA

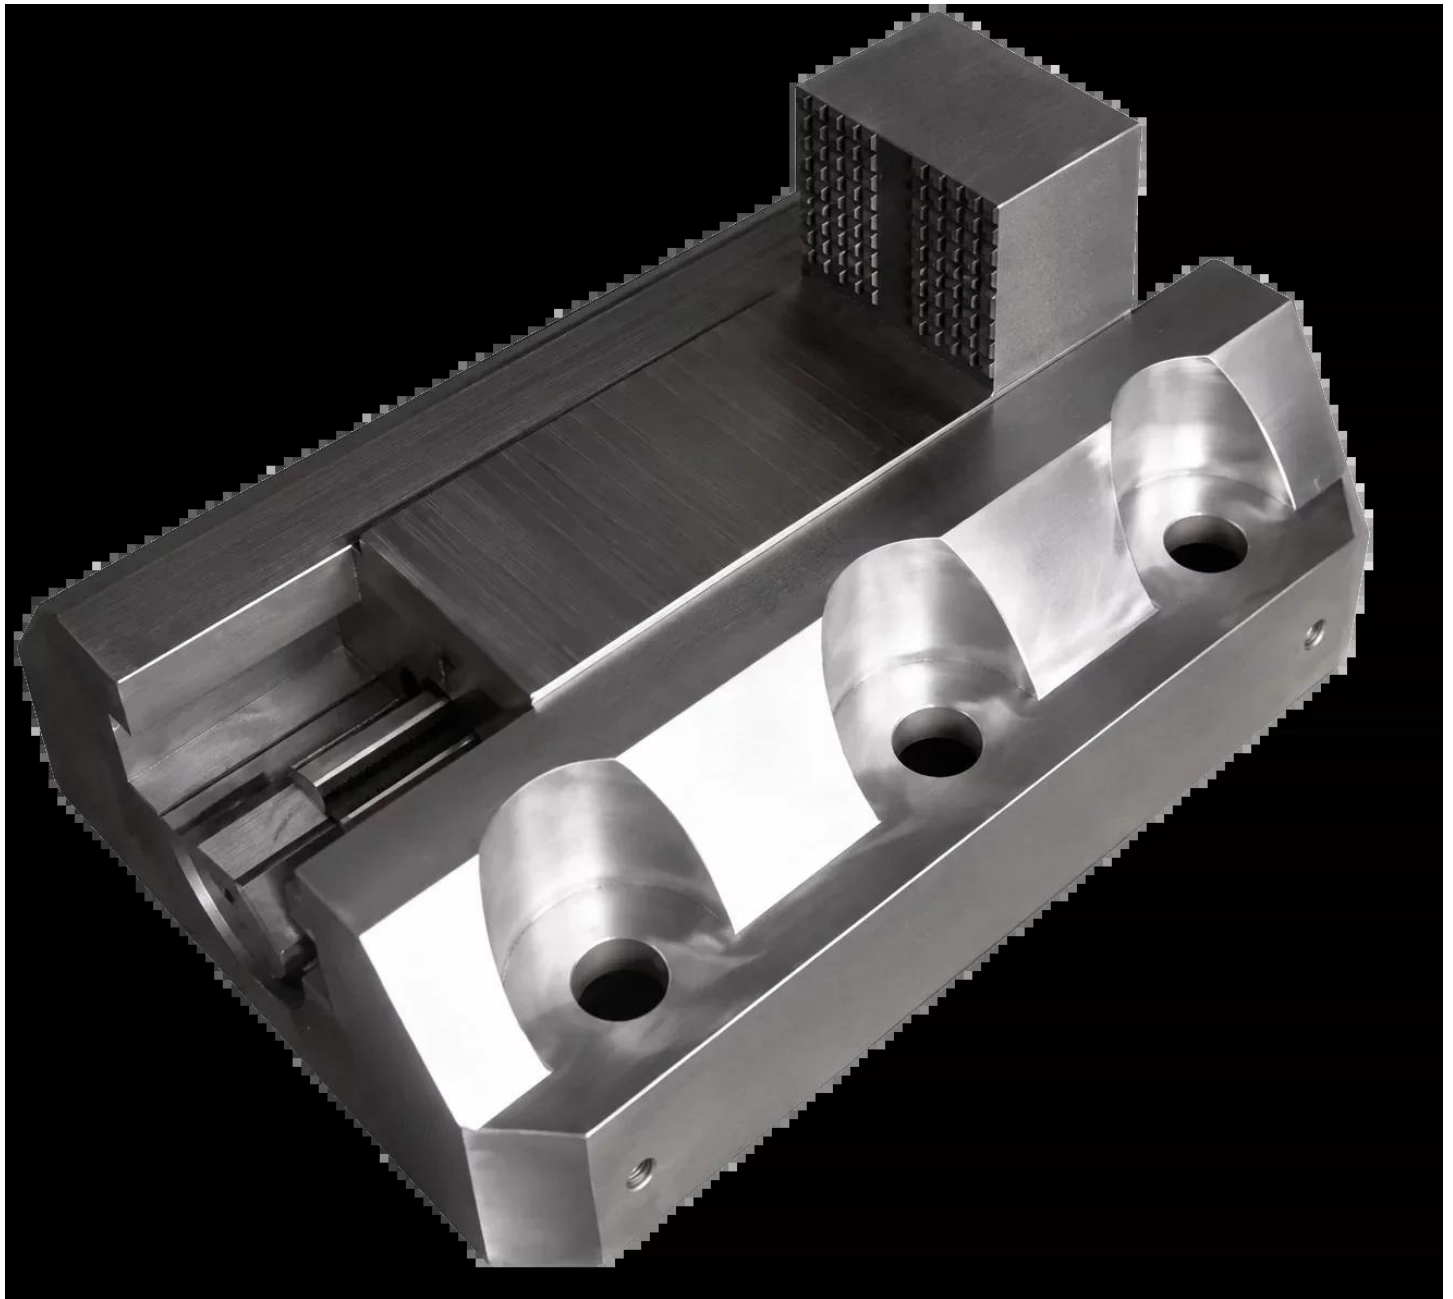

Chuck Jaws

KARTA PRODUKTOWA



Tool Holder

KARTA PRODUKTOWA



Leveling Wedges and Screws

KARTA PRODUKTOWA



Hand Tools

KARTA PRODUKTOWA



Oil Can
Optional Equipment



KARTA PRODUKTOWA



FANUC CNC

KARTA PRODUKTOWA



Electric Turret Head




Linear Scales



Ball Screws



KARTA PRODUKTOWA

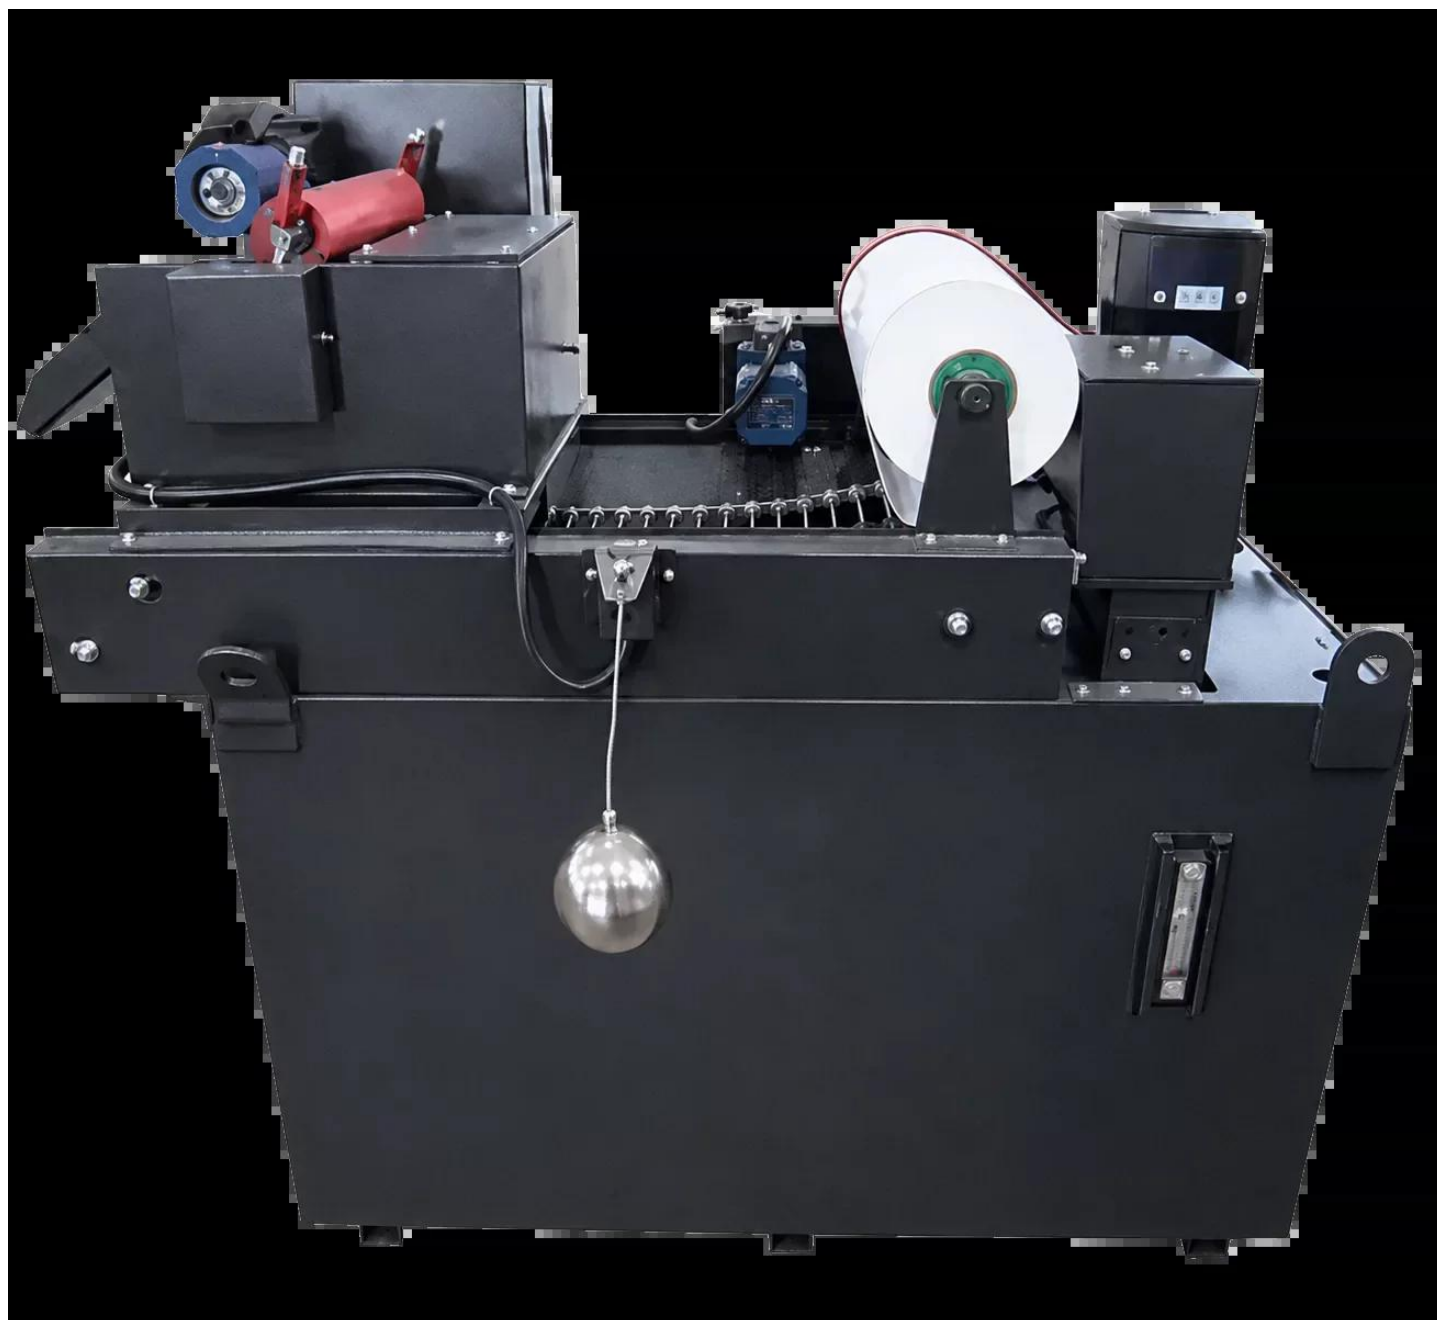

Paper Filter
Industrial Applications

KARTA PRODUKTOWA



Turbine Industry



Tank Industry



Engineering and Manufacturing



Oil & Gas



Forges and Foundries
Technical Features

Key Features of the DTL-63CNC

High-quality castings and a rigid, symmetrical double-column construction.

Two ram heads – one CNC head for finish turning and one manual head for rough machining.

AC/DC main motor with a VDF unit providing variable working speeds.

Hydrostatic bearings enabling machining of heavy workpieces.

Automatic forced lubrication of the main guideways for stable and safe operation.

Feed servodrive and ball screws provide precise CNC feeds.

Precision rotary encoder on the spindle enables threading and CSS machining functions.



KARTA PRODUKTOWA

Siemens SINUMERIK 828D / 840D CNC system with a colour TFT monitor.

Applications

Where is the DTL-63CNC lathe suitable?

The DTL-63CNC is designed for machining large, heavy and oversized components, especially where high system rigidity, CNC repeatability, a stable working table and safe workpiece clamping are required.

Turbine industry — machining large rings, housings, discs and rotating components.

Tank industry — tank components, flanges, rings and oversized elements.

Oil & Gas — plant components, housings, flanges and parts operating in demanding conditions.

Forges and foundries — machining large castings, forgings and components that require a rigid CNC machine.

DTL-63CNC Specifications

Technical Specifications for the DTL-63CNC Model

Model **DTL-63CNC**

Machine Type **Vertical Turning Lathe — double-column CNC vertical turning lathe**

Version **Double-column, CNC**

Maximum Turning Diameter **6300 mm**

Table Diameter / Size **5000 mm, opcjonalnie 5700 mm**

Maximum Workpiece Height **2500 mm, opcjonalnie 3000 / 4000 mm**

Table Load Capacity **50 tonnes, optional 90 / 120 tonnes**

Main Motor Power **75 kW, optional 90 kW**

Number of Working Heads **2 ram heads — one CNC for finish turning, one manual for rough turning**

Motor and Speeds **AC/DC main motor with VDF unit — variable working speeds**

Table Bearings **Hydrostatic bearings for high-load operation**

Lubrication **Automatic forced guideway lubrication**

Feed Drive **Feed servodrive and ball screws for precise feeds**

Spindle Encoder **Precision rotary encoder for threading and CSS functions**

CNC Control **Siemens SINUMERIK 828D / 840D CNC with a colour TFT monitor**

Optional Control **FANUC CNC**

Standard Equipment **Chuck jaws, tool holder, leveling wedges and screws, hand tools, oil can**

Optional Equipment **FANUC CNC, electric turret head, linear scales, ball screws, paper filter**



KARTA PRODUKTOWA

Applications **Turbine industry, tank industry, Oil & Gas, engineering, forges and foundries**